

L Coupling


Roflex[®]



- good temperature and oil resistance
- free of maintenance
- simple structure and easy to install
- The rubbers can be individually replaced when they are worn

L035 - L150

L190 - L276

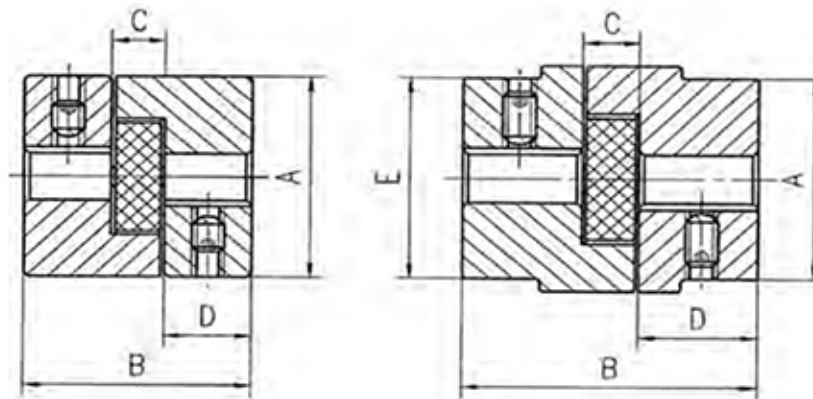

Catalog	fundamental dimensions					torgue needed Nm	rotational speed rpm	Bore max mm	stock bore sizes of the couplings	Mass kg
	A	B	C	D	E					
L035	16	20.2	7.8	6.5	-	0.5	30.000	9	8.9	0.03
L050	28	43	12	15.5	-	3	17.000	16	10.12.14.16	0.13
L070	35	50.7	12.7	19	-	5	13.000	19	10.12.14.16.18.19	0.24
L075	45	55	12.7	20.5	-	10	10.000	24	12.14.16.18.19.20.22.24	0.40
L090	54	55	12.7	21	-	16	9.000	25	14.16.18.19.20.22.24.25	0.68
L095	54	64	12.7	25.5	-	22	9.000	29	14.16.18.19.20.22.24.25.28	0.71
L099	65	73	19	27	-	45	7.000	35	20.22.24.25.28.30.32.35	1.22
L100	65	89	19	35	-	50	7.000	35	20.22.24.25.28.30.32.35	1.40
L110	84	108	22	43	-	90	5.000	42	25.28.30.32.35.38.40.42	3.0
L150	96	115.4	25.4	45	80	150	5.000	48	30.32.35.38.40.42.45.48	5.0
L190	115	133.4	25.4	54	102	200	5.000	54	35.38.40.42.45.48.50	7.6
L225	127	153.4	25.4	64	108	300	4.200	67	38.40.42.45.48.50.55.60.65	9.0
L276	157	200	41	79	127	542	4.200	73	45.48.50.55.60.65.70	21.0

Keyway dimensions conform to DIN 6885, JIS B 1310-1976, UNI 6604-1969, GB 1095-1979 standards.